


SARGON BUCKLING SOLVER	TEST 03	Tested by: M. Croci	
VALIDATION, CROSS CHECKS, RELIABILITY, BENCHMARK	rev.1 14/12/12	Checked by: P. Rugarli	

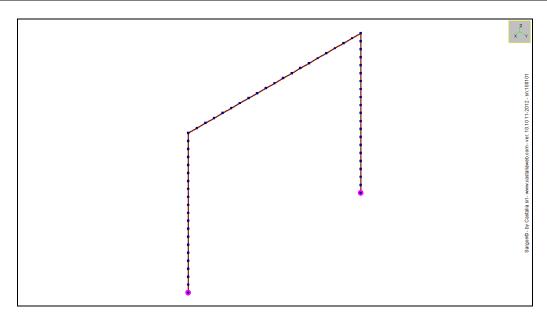

MODEL TO BE CHECKED (A)						
	MODEL NAME	OUTPUT FILE	ANALYSIS TYPE			
Α	buckling_03.wsr	.bou	Sargon buckling			

REFERENCE MODELS						
	MODEL NAME OUTPUT FILE ANALYSIS TYPE					
В	buckling_03.nas	.out	NEiNastran buckling			
С	buckling_03.sdb	.log	Sap2000 buckling			
D	buckling_03_soclever.wsr	.sou	Sargon second order nonlinear			

CROSS-CHECK

The multiplier computed by Sargon buckling (A) is compared to those computed in reference models: % difference (A-X) is equal to (A-X)/X*100, where X value is the result of considered reference X model (for example B).

А	В	% diff.(A-B)	С	% diff.(A-C)	D	% diff.(A-D)
81,5512	77 , 9892	4,57	79 , 727	2,29	75 , 3905	8,17

Settings for Sargon analyses:

Note well: the second order analysis performed by Sargon solver (SOCLEVER) is different from a buckling analysis. Second order step by step does not assume that internal forces grow linearly with load multiplier, as in eigenvalue analysis. Multiplier by second order step by step solver were got by artificially increasing 10 or 100 times the load applied, so that convergence could not be reached. The multiplier < 1 is then multiplied times the increasing factor applied.

Nastran model was automatically created by Femap from the neutral file automatically created by Sargon (.wsr \rightarrow .neu \rightarrow .neu \rightarrow .nas).

Sap2000 models were prepared by converting cross sections analysis data (A, J2, etc), with no use of cross-section dimensions, as Sap2000 does not manage all fillet radius precisely

⁻ Buckling: modes: 1; subspace order: 10; tolerance: 1e-6; max number of iterations: 50

⁻ Second order non linear: load steps: 1; tolerance: 1e-6; max number of iterations: 10