


<b>Validation of Sargon Nonlinear solver (CURAN, version 9.70)</b>			
<b>TEST MB039</b>	<b>VALIDATION, CROSS CHECKS, RELIABILITY, BENCHMARK</b>	Marco Croci	Rev.1-06/04/2011

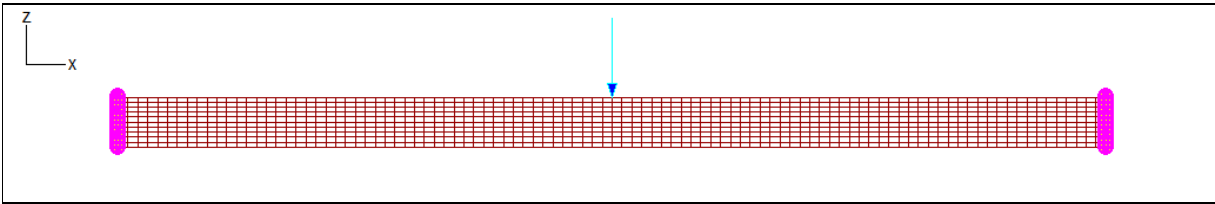

<b>Test description</b>
Constitutive law of membranes material: elastic-perfectly plastic. When limit load is exceeded there is a collapse.
Test model: <b>curanMB_039.WSR</b>

<b>Material properties</b>			
Name	v	$f_y$	E
S235PP	0,3	235N/mm <sup>2</sup>	210000N/mm <sup>2</sup>

<b>Beam</b>			<b>Constraints</b>		<b>Load (z direction)</b>	
LENGTH L	HEIGHT h	THICKNESS b	LEFT	RIGHT	APPLICATION POINT	FORCE F
10000mm	500mm	100mm	Fixed	Fixed	Middle point	-1600000N

<b>Model data</b>			
Membrane elements	Type	Thickness	d.o.f.
1000 (10x100)	QUAD4	100mm	2178

<b>CHECK</b>
--------------

Theor. limit load is $F_{lim}=8*bh^2/4*f_y/L=1175000N$ . Load multiplier is $F_{lim}/F=0,7344$
--

Load case	Value	Unit	CURAN	TARGET	KIND	% diff.
1	Load multiplier	/	8,041E-01	7,344E-01	theoretical	9,49

% difference = (CURAN - TARGET) / TARGET \* 100

Precision of limit multiplier for the analysis: 0.005  
QUAD4: bilinear isoparametric element