


CURAN: BEAMS (HERMITIAN)	TEST 027	rev.1 21/10/13	version 10.70
VALIDATION, CROSS CHECKS, RELIABILITY, BENCHMARK	Tested by: Marco Croci - Checked by: Paolo Rugarli		

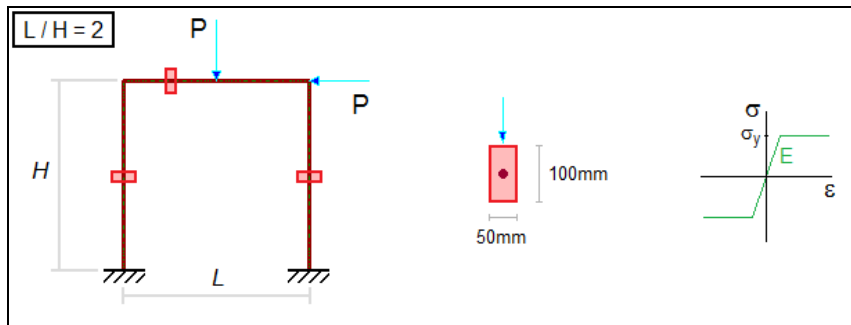

MODEL		
MODELS NAME (see notes)	OUTPUT FILES (see notes)	ANALYSIS TYPE
curanBE_027_elem_xxxx.WSR	curanBE_027_elem_xxxx.cog	nonlinear static (Curan)

DATA					
L [mm]	L/H	P [N]	E [N/mm ²]	σ_y [N/mm ²]	W_{pl} [mm ³]
3000	2	78333	210000	235	125000

THEORETICAL COMPUTATION
Material is elastic-perfectly plastic. For L/H=2, frame failure occurs when (see note below):
$P_{lim} = 6M_{pl} / L$
where $M_{pl} = W_{pl} * \sigma_y = 125000\text{mm}^3 * 235\text{N/mm}^2 = 2.938\text{E}+07\text{Nmm}$ It is
$P_{lim} = 6 * 2.938\text{E}+07\text{Nmm} / 3000\text{mm} = 58750\text{N} < P$
Since applied load P is greater than limit load P_{lim} , frame failure occurs. Load multiplier is:
$P_{lim} / P = 58750\text{N} / 78333\text{N} = 0.75$

CROSS-CHECK


Value	Model	Number of beam elements	Theory	Sargon	% difference (S-T)/T*100
Load multiplier	curanBE_027_elem_0006	6	0.75	1	33.3
Load multiplier	curanBE_027_elem_0012	12	0.75	0.8827	17.7
Load multiplier	curanBE_027_elem_0024	24	0.75	0.8114	8.2
Load multiplier	curanBE_027_elem_0048	48	0.75	0.7784	3.8
Load multiplier	curanBE_027_elem_0096	96	0.75	0.7631	1.7
Load multiplier	curanBE_027_elem_0192	192	0.75	0.7561	0.8
Load multiplier	curanBE_027_elem_0384	384	0.75	0.7511	0.1

NOTES

- 7 different models were created, with different meshes; precision of load multiplier computation depends on mesh refinement. Each model name ends with the number of elements (for example, curanBE_027_elem_0006.WSR has 6 elements; related output file is curanBE_27_elem_0006.cog).
- Theoretical multiplier is computed according to *Calcul Plastique des Constructions*, Ch. Massonnet, M. Save - Italian translation by AA.VV. from Istituto di Scienza e Tecnica delle Costruzioni del Politecnico di Milano, Clup Milano, 1982.
- Applied force is computed in order to get a theoretical load multiplier exactly equal to 0.5.
- Analysis parameters: Lobatto's points: 5. Fibers number: 1000.
- Shear area: not considered.
- Fibers stress in relevant sections of the last model are shown in the following page.

NONLINEAR FIBER MODEL ANALYSIS RESULTS - NORMAL STRESS
 Beam #1 Lobatto's section #1 (csi = -1.000) Lcase = 1 / 1
 Sigma, max= 235.0 N/mm²; Sigma, min= -235.0 N/mm²;


1

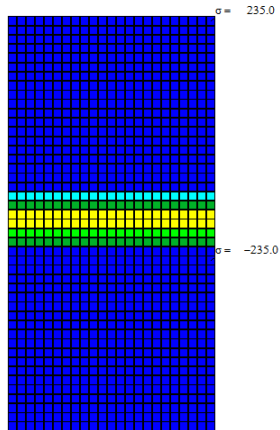

Sargon - Copyright (C) Castalia srl - Milan - Italy - www.steelchecks.com - www.castaliaweb.com

NONLINEAR FIBER MODEL ANALYSIS RESULTS - NORMAL STRESS
 Beam #3 Lobatto's section #1 (csi = -1.000) Lcase = 1 / 1
 Sigma, max= 235.0 N/mm²; Sigma, min= -235.0 N/mm²;


2

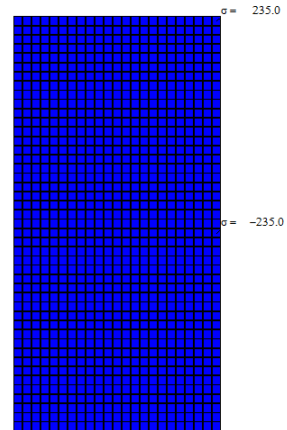

Sargon - Copyright (C) Castalia srl - Milan - Italy - www.steelchecks.com - www.castaliaweb.com

NONLINEAR FIBER MODEL ANALYSIS RESULTS - NORMAL STRESS
 Beam #322 Lobatto's section #5 (csi = 1.000) Lcase = 1 / 1
 Sigma, max= 235.0 N/mm²; Sigma, min= -235.0 N/mm²;


3

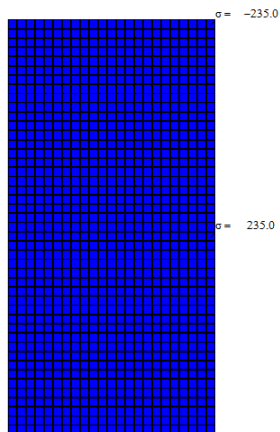


Sargon - Copyright (C) Castalia srl - Milan - Italy - www.steelchecks.com - www.castaliaweb.com

NONLINEAR FIBER MODEL ANALYSIS RESULTS - NORMAL STRESS
 Beam #70 Lobatto's section #5 (csi = 1.000) Lcase = 1 / 1
 Sigma, max= 235.0 N/mm²; Sigma, min= -235.0 N/mm²;

4

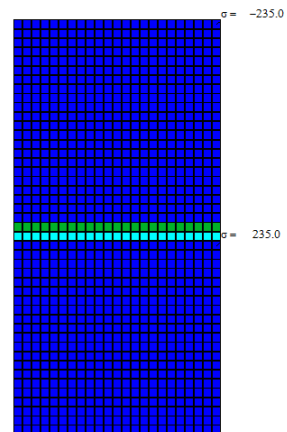

Sargon - Copyright (C) Castalia srl - Milan - Italy - www.steelchecks.com - www.castaliaweb.com

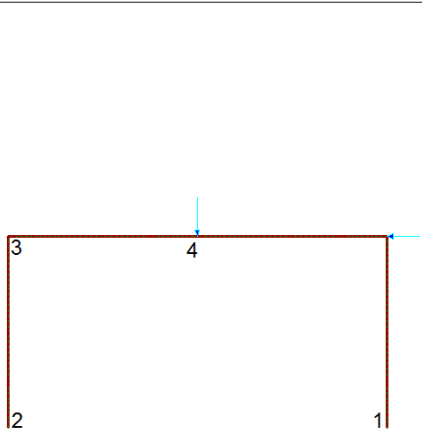

Sargon® - by Castalia srl - www.castaliaweb.com - ver. 11.00.10-2013 - sm:100101