


SARGON BUCKLING SOLVER	TEST 08	Tested by: M. Croci
VALIDATION, CROSS CHECKS, RELIABILITY, BENCHMARK	rev.1 17/12/12	Checked by: P. Rugarli

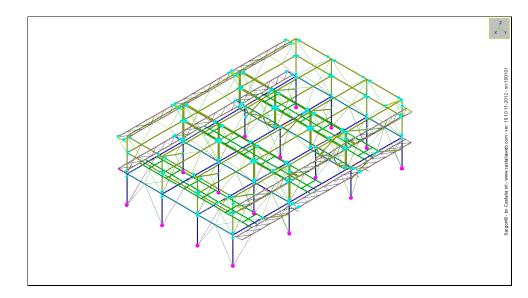

MODEL TO BE CHECKED (A)					
	MODEL NAME	OUTPUT FILE	ANALYSIS TYPE		
А	buckling_08.wsr	.bou	Sargon buckling		

	REFERENCE MODELS						
	MODEL NAME	OUTPUT FILE	ANALYSIS TYPE				
В	buckling_08.nas	.out	NEiNastran buckling				
С	buckling_08.sdb	.log	Sap2000 buckling				
D	buckling_08_soclever.wsr	.sou	Sargon second order nonlinear				

CROSS-CHECK				
The multiplier computed by Sargon buckling (A) is compared to those computed				
in reference models: $\%$ difference (A-X) is equal to (A-X)/X*100, where X value				
is the result of considered reference X model (for example B).				

А	В	% diff.(A-B)	С	% diff.(A-C)	D	% diff.(A-D)
0,9528	0,97165	-1,94	0,95522	-0,25	0,9524	0,04

Settings for Sargon analyses:

- Buckling: modes: 1; subspace order: 10; tolerance: 1e-6; max number of iterations: 50

- Second order non linear: load steps: 1; tolerance: 1e-6; max number of iterations: 10

Note well: the second order analysis performed by Sargon solver (SOCLEVER) is different from a buckling analysis. Second order step by step does not assume that internal forces grow linearly with load multiplier, as in eigenvalue analysis.

Nastran model was automatically created by Femap from the neutral file automatically created by Sargon (.wsr  $\rightarrow$  .neu  $\rightarrow$  .nas).

Sap2000 models were prepared by converting cross sections analysis data (A, J2, etc), with no use of cross-section dimensions, as Sap2000 does not manage all fillet radius precisely